


PRODUCT DATA SHEET PC25-BL 25MM BLUE POLYCARBONATE

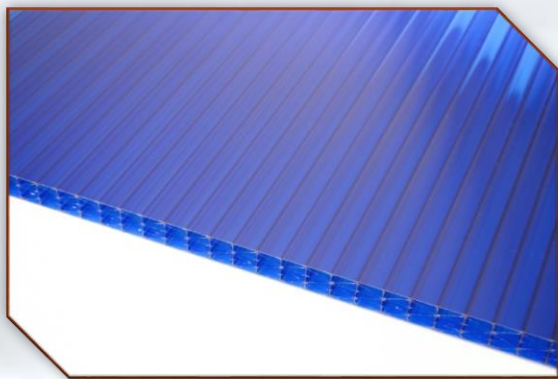

GENERAL DESCRIPTION

25mm Blue Multiwall Polycarbonate sheeting is characterised by high optical clarity, light transmission, impact resistance and durability. It is available in a range of standard sizes. It has a co-extruded UV protection layer on one side. Blue colour is a unique option for special glazing applications. This is under the branded film.

Colours	Light Transmission
Blue	Light 6%
Blue	Solar 45%

Standard Sheet Sizes	
Maximum Width:	2100mm
Standard Max Length:	7m (and CTS)
Thickness:	25mm

Nominal Sheet Weight:	3.1 kg/m ²
U-value	1.4 W/m ² °K

HANDLING & STORAGE

Do not step directly on the rooflight. Use stepping boards. Work according to local safety regulations.

STORAGE

Store in a shaded place, protect from direct sunlight and rain prior to installation. Avoid covering the sheets with heat absorbing materials. Avoid contact with chemicals. Protect the sheets from physical change.

INSTALLATION

Make adequate allowance for thermal movement, nominally 3.5mm per metre. Holes drilled for fixings must be oversized. Sheet lengths must be limited to ensure there is no excessive movement at the end laps.

SERVICE TEMPERATURE

For stable prolonged service ranging from -20°C to 100°C. (Short term unstressed -40°C to 130°C)

MAINTENANCE

In order to maintain this product in good condition it should be cleaned periodically using suitable detergent cleaning agents. Do not use solvent cleaners. Do not scrub with brushed or sharp implements. Avoid cleaning in hot sun or high temperatures.

QUALITY

Manufactured under ISO 9001: 2008 to EN 1013: 2012.

WARRANTY

There is a 10 year limited warranty against loss of light transmission, yellowing and weather impact available for this product.

PDS 008
DOC080 (v1)

www.stormbuildingproducts.com

