




# PRODUCT DATA SHEET

## POLYCARBONATE ROOFING SOLUTIONS

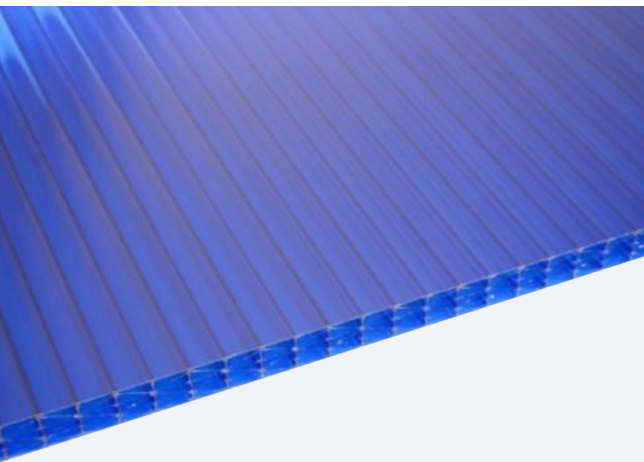

### 25 MM BLUE POLYCARBONATE

#### ABOUT 25 MM BLUE POLYCARBONATE

25mm Blue Multiwall Polycarbonate sheeting is characterised by high optical clarity, light transmission, impact resistance and durability. It is available in a range of standard sizes.

It has a co-extruded UV protection layer on one side. The blue colour is a unique option for special glazing applications. This is under the branded film.

#### LIGHT TRANSMISSION

COLOURS	LIGHT TRANSMISSION
Blue	Light 6%
Blue	Solar 45%

#### SHEET SIZE AND WEIGHT

MEASUREMENT	SIZE / WEIGHT
Maximum Width	2100 mm
Standard Max Length	7 mm (and CTS)
Thickness	25 mm
Nominal Sheet Weight	3.1 kg/m <sup>2</sup>
U-value	1.4 W/m <sup>2</sup> °K

#### HANDLING & STORAGE

Do not step directly on the roof light. Use stepping boards. Work according to local safety regulations.

#### STORAGE

Store in a shaded place; protect from direct sunlight and rain prior to installation. Avoid covering the sheets with heat-absorbing materials. Avoid contact with chemicals. Protect the sheets from physical change.

#### SERVICE TEMPERATURE

For stable prolonged service ranging from -20°C to 100°C (short-term unstressed -40°C to 130°C).

#### MAINTENANCE

In order to maintain this product in good condition, it should be cleaned periodically using suitable detergent cleaning agents. Do not use solvent cleaners. Do not scrub with brushed or sharp implements. Avoid cleaning in hot sun or high temperatures.

#### QUALITY

Manufactured under ISO 9001: 2008 to EN 1013: 2012.

#### WARRANTY

There is a 10-year limited warranty against loss of light transmission, yellowing and weather impact available for this product.

