




# PRODUCT DATA SHEET

## CORRUGATED SHEETING

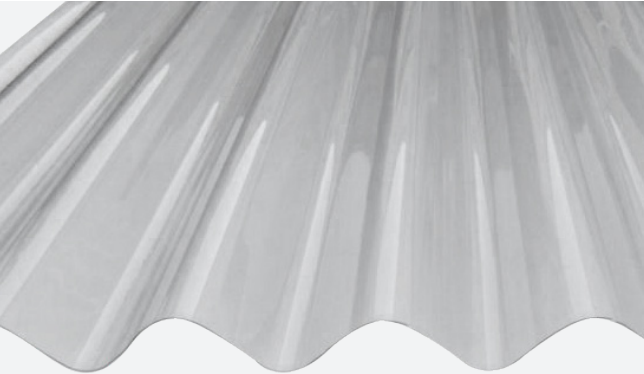

### PVC CORRUGATED SHEETING

#### ABOUT PVC CORRUGATED SHEETING

PVC Corrugated Sheeting is a highly durable corrugated PVC sheet. Excellent chemical, weather and UV resistance. It is ideal for roofing, siding and cladding in industry, agriculture, construction and DIY.

PVC Corrugated Sheeting is characterised by high optical clarity and light transmission. It is available as high impact and in a range of standard profiles and thicknesses in clear. PVC Corrugated Sheeting is a tin-established product.

#### LIGHT TRANSMISSION

COLOURS	LIGHT TRANSMISSION
	DIN 5036
Clear	76% (1.1 mm)

#### SHEET SIZE AND WEIGHT

MEASUREMENT	SIZE / WEIGHT
Width	762 mm, 1525 mm, 1830 mm, 2135 mm, 2440 mm, 2745 mm, 3050 mm, 3660 mm
Length	As required
Thickness	1.1 mm to 1.3 mm
Sheet Weight	1.4 kg/m <sup>2</sup> @ 1 mm
U-value	5.7 W/m <sup>2</sup> °K @ 1 mm

#### SERVICE TEMPERATURE

PVC Corrugated Sheeting can be installed in a diversity of applications with varying temperatures. The material's mechanical performance is known to remain stable in prolonged service in temperatures ranging from -20 to +60°C.

#### FIRE PERFORMANCE

PVC Corrugated Sheeting has been independently tested. For the most up to date certifications, please contact the technical department.

TEST METHOD	CLASSIFICATION
ENI1925-2, ENI3823	B <sub>s</sub> I-d0 (ENI3501-2)

